



## Specifications & Features


- Screwed female ends to BSP.
- Full bore & perfect right angle to ensure unobstructed flow.
- High quality antirust coating on threads.
- Hot galvanised with uniform zinc coating.
- Superior grade malleability to ensure crack free installation.
- Heavy pattern & superb in quality and performance.
- Functionally sturdy and visually attractive.
- Full threaded length with precise right angled diversion at 90°.

## Suitable For

Steam	Water	Oil	Air	Gases
○	●	●	●	●

## Test Pressure

25kg/cm<sup>2</sup>g (Hydraulic)

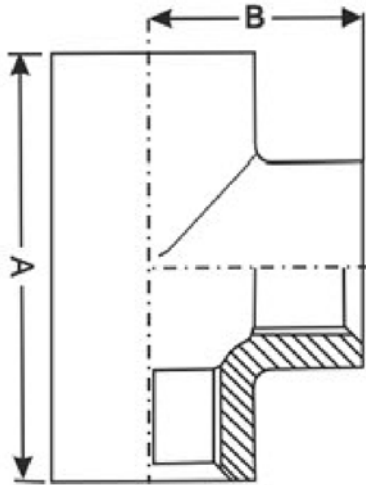

## Dimensional Data

Nominal Size (mm)	A	+-	B	+-
15	64	2.5	32	2
20	74	2.5	37	2
25	82	3	41	2
32	94	3	47	2
40	104	3.5	52	2.5
50	120	3.5	60	2.5
65	140	3.5	70	2.5
80	158	4	79	3
100	192	4	96	3
150	262	5	131	3.5