




Specifications & Features

- Screwed female ends to BSP.
- Full bore & perfect right angle to ensure unobstructed flow.
- High quality antirust coating on threads.
- Hot galvanised with uniform zinc coating.
- Superior grade malleability to ensure crack free installation.
- Heavy pattern & superb in quality and performance.
- Functionally sturdy and visually attractive.
- Full threaded length with precise right angled diversion at 90°.

Dimensional Data

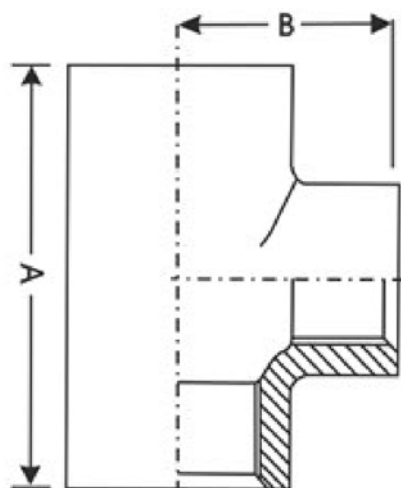

Nominal Size (mm)	A	+-	B	+-
20 x 15	66	2.5	36	2
25 x 15	68	2.5	37	2
32 x 15	72	2.5	42	2
40 x 15	76	3	47	2
50 x 15	80	3	53	2.5
65 x 15	84	3	59	2.5
80 x 15	91	3	67	2.5
100 x 15	98	3	81	3
25 x 20	72	2.5	38	2
32 x 20	76	3	43	2
40 x 20	80	3	48	2
50 x 20	84	3	54	2.5
65 x 20	91	3	59	2.5
80 x 20	93	3	67	2.5
100 x 20	106	3.5	81	3
32 x 25	84	3	44	2
40 x 25	88	3	49	2
50 x 25	91	3	55	2.5
65 x 25	93	3	62	2.5
80 x 25	104	3.5	68	2.5
100 x 25	112	3.5	84	3
40 x 32	95	3	50	2
50 x 32	99	3	56	2.5
65 x 32	104	3.5	63	2.5
80 x 32	112	3.5	71	2.5
100 x 32	123	3.5	84	3
50 x 40	107	3.5	58	2.5
65 x 40	112	3.5	64	2.5
80 x 40	117	3.5	83	3
100 x 40	126	3.5	86	3
65 x 50	123	3.5	65	2.5
80 x 50	129	3.5	74	2.5
100 x 50	142	3.5	86	3
80 x 65	142	3.5	77	3
100 x 65	152	4	89	3
100 x 80	167	4	92	3

Suitable For

Steam	Water	Oil	Air	Gases
○	●	●	●	●

Test Pressure

25kg/cm²g (Hydraulic)