



Specifications & Features


- Screwed female left & right hand threaded ends to BSP.
- High quality antirust coating on threads.
- Hot galvanised with uniform zinc coating.
- Superior grade malleability to ensure crack free installation.
- Heavy pattern & superb in quality and performance.
- Functionally sturdy and visually attractive.
- Protruded external ribs to facilitate comfortable wrenching.

Suitable For

Steam	Water	Oil	Air	Gases
○	●	●	●	●

Test Pressure

25kg/cm²g (Hydraulic)

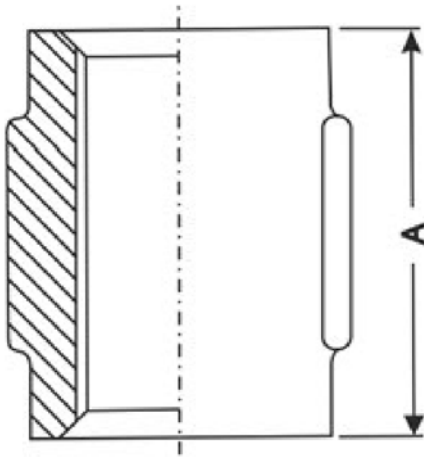

Dimensional Data

Nominal Size (mm)	A	+ -
15	40	2
20	44	2
25	48	2
32	53	2.5
40	58	2.5
50	65	2.5
65	85	3
80	95	3
100	95	3
150	122	3.5