




Specifications & Features

- Screwed female left & right hand threaded ends to BSP.
- High quality antirust coating on threads.
- Hot galvanised with uniform zinc coating.
- Superior grade malleability to ensure crack free installation.
- Heavy pattern & superb in quality and performance.
- Functionally sturdy and visually attractive.
- Protruded external ribs to facilitate comfortable wrenching.

Dimensional Data

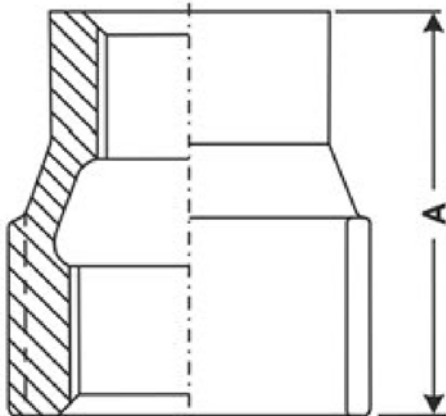

Nominal Size (mm)	A	+/-
20 x 15	43	2
25 x 15	47	2
32 x 15	53	2.5
40 x 15	58	2.5
50 x 15	68	2.5
65 x 15	72	2.5
80 x 15	80	3
100 x 15	93	3
25 x 20	47	2
32 x 20	53	2.5
40 x 20	58	2.5
50 x 20	68	2.5
65 x 20	72	2.5
80 x 20	80	3
100 x 20	93	3
32 x 25	53	2.5
40 x 25	58	2.5
50 x 25	68	2.5
65 x 25	72	2.5
80 x 25	80	3
100 x 25	93	3
40 x 32	58	2.5
50 x 32	68	2.5
65 x 32	75	2.5
80 x 32	80	3
100 x 32	93	3
50 x 40	68	2.5
65 x 40	75	2.5
80 x 40	80	3
100 x 40	93	3
65 x 50	75	2.5
80 x 50	82	3
100 x 50	95	3
80 x 65	82	3
100 x 65	95	3
100 x 80	95	3

Suitable For

Steam	Water	Oil	Air	Gases
○	●	●	●	●

Test Pressure

25kg/cm²g (Hydraulic)