



Specifications & Features


- Screwed female ends to BSP.
- High quality antirust coating on threads.
- Hot galvanised with uniform zinc coating.
- Superior grade malleability to ensure crack free installation.
- Heavy pattern & superb in quality and performance.
- Functionally sturdy and visually attractive.
- Contains superior quality synthetic rubber washer for a leakproof & smooth jointing.

Suitable For

Steam	Water	Oil	Air	Gases
○	●	●	●	●

Test Pressure

25kg/cm²g (Hydraulic)

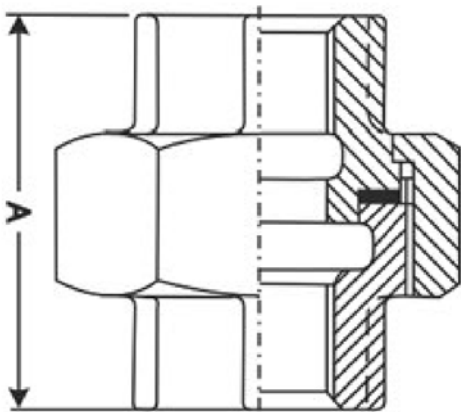

Dimensional Data

Nominal Size (mm)	A	+ -
15	55	2.5
20	60	2.5
25	67	2.5
32	77	3
40	77	3
50	87	3
65	93	3
80	101	3.5
100	123	3.5
150	152	4