



Specifications & Features

- Screwed male end to BSPT.
- Superior grade malleability to ensure crack free installation.
- High quality antirust all over coating.
- Perfect square head for comfortable spanning & a slip free grip.


Suitable For

Steam	Water	Oil	Air	Gases
○	●	●	●	●

Test Pressure

25kg/cm²g (Hydraulic)

Dimensional Data

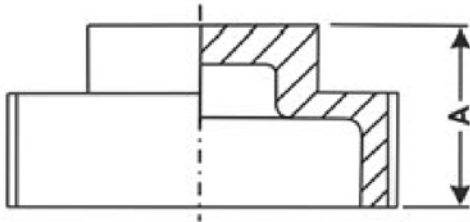

Nominal Size (mm)	A	+ -
15	18	1.5
20	20	1.5
25	23	1.5
32	29	1.5
40	30	1.5
50	36	2
65	39	2
80	44	2
100	58	2.5
150	65	2.5