



## Specifications & Features

- High quality antirust coating on threads.
- Hot galvanised with uniform zinc coating.
- Superior grade malleability to ensure crack free installation.
- Heavy pattern & superb in quality and performance.
- Screwed male ends to BSPT.


## Suitable For

Steam	Water	Oil	Air	Gases
○	●	●	●	●

## Test Pressure

25kg/cm<sup>2</sup>g (Hydraulic)

## Dimensional Data

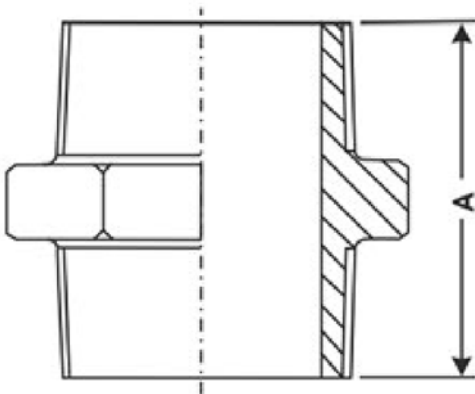

Nominal Size (mm)	A	+ -
15	44	2
20	47	2
25	54	2.5
32	57	2.5
40	59	2.5
50	68	2.5
65	75	2.5
80	83	3
100	95	3