



## Specifications & Features


- Full bore to ensure unobstructed flow.
- Screwed male ends to BSPT.
- High quality antirust coating on threads.
- Hot galvanised with uniform zinc coating.
- Superior grade malleability to ensure crack free installation.
- Functionally sturdy and visually attractive.
- Heavy pattern & superb in quality and performance.
- Contains superior quality synthetic rubber washers for a leakproof & smooth jointing.

## Suitable For

|       |       |     |     |       |
|-------|-------|-----|-----|-------|
| Steam | Water | Oil | Air | Gases |
| ○     | ●     | ●   | ●   | ●     |

## Test Pressure

25kg/cm<sup>2</sup>g (Hydraulic)

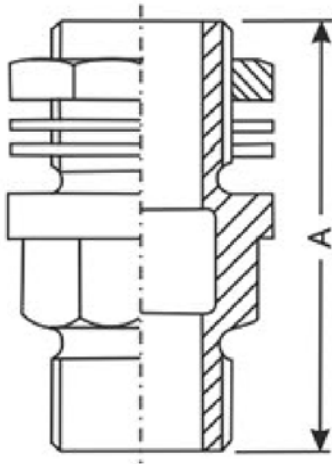

## Dimensional Data

| Nominal Size (mm) | A   | + - |
|-------------------|-----|-----|
| 15                | 64  | 2   |
| 20                | 69  | 2   |
| 25                | 83  | 2   |
| 32                | 98  | 2   |
| 40                | 100 | 2.5 |
| 50                | 109 | 2.5 |
| 65                | --  | --  |
| 80                | --  | --  |
| 100               | --  | --  |